

UTILITY
PATENT APPLICATION
TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

684.3049

First Named Inventor or Application Identifier

SHIGETO KAMATA, ET AL.

Express Mail Label No.

JCS535 U.S. PTO
09/19/00

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

- ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification Total Pages
3. ☒ Drawing(s) (35 USC 113) Total Sheets
4. ☒ Oath or Declaration Total Pages
- a. ☐ Newly executed (original or copy)
- b. ☒ Unexecuted for information purposes
- c. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
- i. ☐ DELETION OF INVENTOR(S)
Signed Statement attached deleting
inventor(s) named in the prior application, see
37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of
the oath or declaration is supplied under Box 4c, is considered as
being part of the disclosure of the accompanying application and is
hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity ☐ Statement filed in prior application
Statement(s) Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. _____

18. CORRESPONDENCE ADDRESS

☒

Customer Number or Bar Code Label

05514

(Insert Customer No. or Attach bar code label here)

or ☐

Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax

| CLAIMS | (1) FOR | (2) NUMBER FILED | (3) NUMBER EXTRA | (4) RATE | (5) CALCULATIONS |
|--------|---|------------------|------------------|---|------------------|
| | TOTAL CLAIMS (37 CFR 1.16(c)) | 19-20 = | 0 | X \$ 18.00 = | \$ 0 00 |
| | INDEPENDENT CLAIMS (37 cfr 1.16(b)) | 8-3 = | 5 | X \$ 78 00 = | \$ 390.00 |
| | MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d)) | | | \$ 260.00 = | \$ 0.00 |
| | | | | BASIC FEE (37 CFR 1.16(a)) | \$ 690.00 |
| | | | | Total of above Calculations = \$1080.00 | |
| | Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28) | | | | |
| | TOTAL = | | | | \$1080.00 |

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.


20. ☒ A check in the amount of \$1080.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16
- b. ☐ Fees required under 37 CFR 1.17
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED
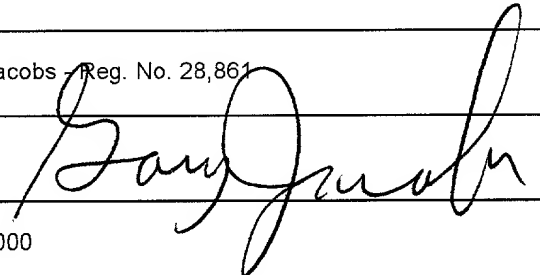
| | |
|-----------|--|
| NAME | Gary M. Jacobs - Reg. No. 28,861 |
| SIGNATURE |  |
| DATE | July 19, 2000 |

GMJlcmv

LINEAR MOTOR STAGE SYSTEM
FOR USE IN EXPOSURE APPARATUS

FIELD OF THE INVENTION AND RELATED ART

5 This invention relates to a linear motor and
a stage system with the same, suitably usable in an
apparatus such as a semiconductor exposure apparatus
or a high precision processing machine wherein precise
positioning is to be performed. The present invention
10 also relates to an exposure apparatus and/or a device
manufacturing method using such a linear motor or a
stage system.

 In an positioning system of nanometer order
for use in a semiconductor exposure apparatus or a
15 high precision processing machine, heat generation at
a linear motor which is a driving source has an
adverse influence on the positioning process. More
specifically, the heat generation may cause thermal
deformation of a structure and a temperature rise of
20 an air which may result in a measurement error in a
position measuring laser interferometer. It may cause
degradation of the positioning precision of the
apparatus wherein the linear motor is incorporated.
For example, only with a temperature rise of 1 °C, a
25 low thermal expansion material (thermal expansion
coefficient 1×10^{-6}) of a size 100 mm may deform by 100
nm. Also, only with a change of 1 °C or less in the

00619665-071900

temperature of an air at the light path of an optical interferometer distance gauge, an error of 100 nm may be produced in the measured value. In consideration of this, some measures should be taken to prevent such temperature change and, in this respect, a linear motor has to be cooled. Particularly, any heat produced from the linear motor should be collected.

On the other hand, in order to meet an improvement of the performance of an apparatus, enlargement of the output power of a linear motor has been desired. If the electric current to be supplied to coils of the motor is made larger to this end, the amount of heat generation becomes larger. It requires enlargement of the cooling capacity. The enlargement of the cooling capacity is important also in respect to prevention of damage of coil wires or an increase in coil resistance due to a coil temperature rise.

Figure 15 is a sectional view of a structure of a conventional linear motor having cooling means. As illustrated, the linear motor comprises a coil 1 and permanent magnets 3 fixed to yokes 2 on the opposite sides of the coil 1. The coil 1 is surrounded by a jacket 9 which comprises thin sheets 4 and 4' and a frame 5. The coil 1 is fixed to the frame 5 by means of a fixing element 7. The jacket 9 is structured so that a cooling medium flows through an inside space 6 thereof, to collect heat produced at

00649665 071900

the coil 1.

Figure 16 is a sectional view of a linear motor of another example. In this linear motor, an electric current flows through a coil 1 (lateral in the drawing) disposed in a magnetic field (longitudinal in the drawing) produced by permanent magnets 3 which are fixed to yokes 2. In response to it, the coil 1 and the magnets 3 are relatively moved in a direction perpendicular to the sheet of the drawing. In order to collect heat produced from the coil 1, the coil 1 is enclosed by a jacket having portions 14 and 14'. A cooling medium flows through a clearance between the coil 1 and the jacket, by which the heat is collected. In order that the distance between the permanent magnets 3 is made smaller and the produced magnetic density is made larger for enlargement of the linear motor thrust, the jacket is made thin.

In these examples, however, if the flow rate of the cooling medium is made larger to increase the cooling capacity, a resultant pressure rise of the cooling medium may cause outward deformation of a small-thickness portion of the jacket. It may result in contact with the permanent magnet or breakage of the jacket. To avoid this, the small-thickness portion of the jacket should have a sufficient strength. To the contrary, for an increased output

09619665 071900

power of a linear motor, the distance between permanent magnets has to be made small to enlarge the magnetic density. In this respect, the small-thickness portion of the jacket should be made thin as much as possible to reduce the size of the jacket.

Further, in a case of a multiple-phase linear motor having coils such as being arrayed along a direction perpendicular to the sheet of the drawing of Figure 16, the coil and jacket structure extends in the direction perpendicular to the sheet of the drawing. In such example, the natural frequency of the structure should be made large to reduce the adverse influence on a high-precision positioning system wherein the linear motor is incorporated.

SUMMARY OF THE INVENTION

It is accordingly an object of the present invention to provide a linear motor structure and/or a stage system with the same wherein the thickness of a small-thickness portion can be kept small while the strength of the same is enlarged.

It is another object of the present invention to provide a invention to provide a linear motor structure and/or a stage system with the same wherein a coil and jacket structure has an enlarged natural vibration frequency.

It is a further object of the present

09619665 071900

invention to provide an exposure apparatus and/or a device manufacturing system which uses a linear motor structure or a stage system such as described above.

In accordance with an aspect of the present invention, there is provided a linear motor, comprising: a magnet; a coil; and a jacket having an inside comb-shaped member extending along a driving direction, wherein the coil is engaged by teeth of said comb-shaped member and wherein a cooling medium is flown through an inside space enclosed by said jacket.

The comb-shaped member may include base portions provided on mutually opposed inside faces of said jacket and formed in parallel to the driving direction and to be opposed to each other, and a pillar-like portion for connecting said base portions, wherein the coil may be floatingly supported by said base portions while it may be held fixed by said pillar-like portion with respect to the driving direction.

The linear motor may include a plurality of coils arrayed along the driving direction with partial overlapping with each other, wherein each coil may have a bent end portion to avoid mutual interference of the partially overlapped portions of the coils, and wherein the coils may be disposed with their central portions placed substantially at the same level.

The jacket may have a central small-thickness portion with an outside recessed portion, wherein the bent end portions of the coils may be disposed at the recessed portion, and wherein the central small-
5 thickness portion may be reinforced by the recessed portion.

The jacket may serve as a guide for an element to be driven by said linear motor.

In accordance with another aspect of the
10 present invention, there is provided a stage system, comprising: a movable stage; a linear motor having a magnet and a coil, for driving said stage; and a jacket having an inside comb-shaped member extending along a driving direction, wherein the coil is engaged
15 by teeth of said comb-shaped member and wherein a cooling medium is flown through an inside space enclosed by said jacket.

In accordance with a further aspect of the present invention, there is provided an exposure
20 apparatus, comprising: a movable stage for holding a substrate thereon; a linear motor having a magnet and a coil, for driving said stage; and a jacket having an inside comb-shaped member extending along a driving direction, wherein the coil is engaged by teeth of
25 said comb-shaped member and wherein a cooling medium is flown through an inside space enclosed by said jacket.

09619665 071900

In accordance with a yet further aspect of the present invention, there is provided a device manufacturing method, comprising the steps of:

applying a photosensitive material onto a substrate;

5 exposing the substrate by use of an exposure apparatus including a movable stage for holding a substrate thereon, a linear motor having a magnet and a coil, for driving said stage, and a jacket having an inside comb-shaped member extending along a driving
10 direction, wherein the coil is engaged by teeth of said comb-shaped member and wherein a cooling medium is flown through an inside space enclosed by said jacket; and developing the exposed substrate.

In accordance with a still further aspect of
15 the present invention, there is provided a linear motor, comprising: a magnet; a coil; and a jacket having a reinforcement portion extending in parallel to a driving direction, wherein said coil is enclosed by said jacket and wherein a cooling medium is flown
20 through an inside space of said jacket.

The reinforcement portion may be formed on an outside face of said jacket.

The reinforcement portion may be formed at a position not interfering with relative motion of said
25 magnet and said coil.

The reinforcement portion may be made of one of aluminum, ceramics and resin.

09619665 071900

The reinforcement portion may be made integral with said jacket, and said reinforcement portion may be defined by a portion having a protruded shape with respect to a level of a portion of said jacket where said magnet and said coil are opposed to each other.

The jacket and reinforcement portion being integral with each other may be made of one of ceramics and resin.

The protruded shape portion of said jacket may be defined by an inside recessed portion of said jacket where a portion of the coil is placed.

At least one of an upper half and a lower half of a section of said jacket taken along a plane perpendicular to the driving direction may have a recessed shape portion.

In accordance with another aspect of the present invention, there is provided a stage system, comprising: a movable stage; a linear motor having a magnet and a coil, for driving said stage; and a jacket having a reinforcement portion extending in parallel to a driving direction, wherein said coil is enclosed by said jacket and wherein a cooling medium is flown through an inside space of said jacket.

In accordance with a further aspect of the present invention, there is provided an exposure apparatus, comprising: a movable stage for holding a

00619665 071900

substrate thereon; a linear motor having a magnet and a coil, for driving said stage; and a jacket having a reinforcement portion extending in parallel to a driving direction, wherein said coil is enclosed by said jacket and wherein a cooling medium is flown through an inside space of said jacket.

In accordance with a yet further aspect of the present invention, there is provided a device manufacturing method, comprising the steps of:

applying a photosensitive material onto a substrate; exposing the substrate by use of an exposure apparatus having a movable stage for holding a substrate thereon, a linear motor having a magnet and a coil, for driving said stage, and a jacket having a reinforcement portion extending in parallel to a driving direction, wherein said coil is enclosed by said jacket and wherein a cooling medium is flown through an inside space of said jacket; and developing the exposed substrate.

The comb-shaped member or the reinforcement member functions to enlarge the strength of the jacket against the pressure of the cooling medium inside the jacket. Thus, even if the pressure of the cooling medium is made larger or the size of the jacket is made smaller, unwanted deformation or breakage of the jacket can be prevented. A linear motor with its output power enlarged as compared with conventional

09519665 "071900

structures can be provided, such that a stage system, an exposure apparatus or a device manufacturing method using such a linear motor can also be provided.

5 The comb-shaped member or the reinforcement member is provided in an inside space of the linear motor. Therefore, without the need of enlargement in size of the linear motor, deformation or breakage of the jacket can be prevented and, on the other hand, the cooling efficiency can be improved. Further, the provision of the comb-shaped member or the reinforcement member effectively improves the rigidity of the jacket, the natural frequency of the jacket can be made higher. This effectively leads to improvements in precision of a precision positioning apparatus or precision machining apparatus wherein the linear motor is incorporated.

15 These and other objects, features and advantages of the present invention will become more apparent upon a consideration of the following description of the preferred embodiments of the present invention taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

25 Figure 1 is a perspective and exploded view of a jacket of a linear motor according to a first embodiment of the present invention.

00619665 071900

Figure 2 is a perspective view of an example of a combination of coils to be disposed within the jacket of Figure 1.

Figure 3 is a sectional view of a linear
5 motor with the jacket of Figure 1, taken along a plane perpendicular to the driving direction.

Figure 4 is a sectional view of the linear motor of Figure 1, taken along the driving direction.

Figure 5 is a sectional view of a jacket of a
10 linear motor according to a second embodiment of the present invention, taken along a plane perpendicular to the driving direction.

Figure 6 is a sectional view of the linear motor of Figure 5, taken along the driving direction.

Figure 7 is a sectional view of a jacket of a
15 linear motor according to a third embodiment of the present invention, taken along a plane perpendicular to the driving direction.

Figure 8 is a sectional view of the linear
20 motor of Figure 7, taken along the driving direction.

Figure 9 is a sectional view of a linear motor according to a fourth embodiment of the present invention, taken along a plane perpendicular to the driving direction.

Figure 10 is a sectional view of a linear
25 motor according to a fifth embodiment of the present invention, taken along a plane perpendicular to the

09649665.074900

driving direction.

Figure 11 is a sectional view of a linear motor according to a sixth embodiment of the present invention, taken along a plane perpendicular to the driving direction.

Figure 12 is a schematic view of an exposure apparatus having a wafer stage system including a linear motor according to any one of the first to sixth embodiments.

Figure 13 is a flow chart of semiconductor device manufacturing processes, using an exposure apparatus according to the present invention.

Figure 14 is a flow chart for explaining details of a wafer process included in the procedure of Figure 13.

Figure 15 is a sectional view of a structure of a conventional linear motor with cooling means.

Figure 16 is a sectional view of another example of a conventional linear motor.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of the present invention will now be described with reference to the accompanying drawings.

[Embodiment 1]

Figure 1 is a perspective and exploded view

09619665-071900

of a jacket of a linear motor according to a first embodiment of the present invention. Figure 2 is a perspective view of an example of a combination of coils to be disposed within the jacket of Figure 1.

5 Figure 3 is a sectional view of a linear motor with the jacket of Figure 1, taken along a plane perpendicular to the driving direction. Figure 4 is a sectional view of the linear motor of Figure 1, taken along the driving direction. In these drawings,

10 denoted at 1a is a flat coil, and denoted at 14 and 14' are jacket elements constituting a jacket.

Denoted at 8 is a comb-shaped structure formed on the jacket elements 14 and 14'. The coil 1a through which an electric current is to be flown is disposed inside
15 the jacket defined by the jacket elements 14 and 14'. It is held fixed at recessed portions of the comb-shaped structure 8, defined by the jacket elements 14 and 14', by using an adhesive agent, for example.

Denoted at 1b is a bent coil wherein, as shown in
20 Figure 2, a portion of the bent coil 1b is placed into a void core portion of the flat coil 1a. There are a plurality of coils, being paired such as shown in Figure 2, which are arrayed and covered by the jacket. Although in Figure 1 there is only a flat coil 1a
25 illustrated, a bent coil 1b is provided there in the positional relation with the flat coil 1a as shown in Figure 2. The comb-shaped structure 8 includes base

00619665 071900

portions 11 which are formed on the opposed inside faces of the jacket, along a direction parallel to the driving direction, so as to be opposed to each other, as well as pillar portions 12 connecting the opposed base portions. The base portions serve to floatingly support the coils 1a and 1b so that the coils are floated from the inside faces of the jacket. The pillar portions serve to hold the coils 1a and 1b fixed with respect to the driving direction.

In Figure 3, denoted at 2 and 2' are yokes, and denoted at 3 and 3' are permanent magnets. A portion of the coils 1a and 1b is disposed in a magnetic field which is produced by a magnetic circuit defined by the permanent magnets 3 and 3' and yokes 2 and 2'. When an electric current is flown through the coils 1a and 1b, the coils 1a and 1b and the permanent magnets 3 and 3' are relatively driven in opposite directions, along a direction perpendicular to the sheet of the drawing. In the portion of Figure 3 where the magnetic field is produced (a region M in Figure 2), a portion of the bent coil 1b is placed into the void core portion of the flat coil 1a. This effectively shorten the gap of the space where the magnetic field is produced. Therefore, it effectively increases the magnetic field. Further, since the opposite end portions of the bent coil 1b are bent upwardly above the flat coil 1a, the jacket element

14' is formed with an inside recessed portion corresponding to the shape of the coil.

As shown in Figure 4, the portions of the coils 1a and 1b in the region where the magnetic field is produced are placed at the same level. The coils 1a and 1b are held fixed by the comb-shaped structure 8, and there are spaces defined between the jacket and the coils 1a and 1b. In Figure 4, the magnetic circuit (permanent magnets and yokes) is not illustrated.

The jacket elements 14 and 14' are sealingly fixed to each other by means of an adhesive agent or bolts. A temperature controlled cooling medium is flown through the space between the jacket and the coils 1a and 1b, to thereby collect heat generated by the coils 1a and 1b. With this arrangement, any temperature rise of the coils 1a and 1b themselves as well as any temperature rise of a component mounted on the linear motor or of an environment thereof can be prevented. The pillars 12 of the comb-shaped structure 8 formed on the jacket element 14 are fixed to the base portions 11 of the jacket element 14'. This effectively prevents outward deformation of the jacket by the inside pressure of the cooling medium. The recessed portion of the jacket 14' accommodating the opposite ends of the bent coil 1b serves to reinforce the small-thickness portion of the jacket

09619665-071900

where the magnetic field is applied.

In accordance with this embodiment, even if the pressure of the cooling medium is increased or the thickness of the jacket sheet is made smaller, unwanted deformation or breakage of the jacket can be prevented. Therefore, the flow rate of the cooling medium made larger to improve the cooling efficiency and also the jacket can be made compact. This leads to an improvement of the linear motor thrust.

[Embodiment 2]

Figure 5 is a sectional view of a jacket of a linear motor according to a second embodiment of the present invention, taken along a plane perpendicular to the driving direction. Figure 6 is a sectional view of the linear motor of Figure 5, taken along the driving direction. In these drawing, a magnetic circuit (permanent magnets and yokes) is not illustrated. In the example of Figures 3 and 4, the connection face between the jacket elements 14 and 14' is at the same level as the upper surface of the coil 1a. In this embodiment, as compared therewith, the connection face is placed at the central portion of the coil 1a. In this manner, the contact face between the jacket elements 14 and 14' can be changed in the height direction in the drawing. The remaining portion of this embodiment has substantially the same

structure and function as the first embodiment.
Substantially the same advantageous results as of the
first embodiment are attainable with this embodiment.

5 [Embodiment 3]

Figure 7 is a sectional view of a jacket of a
linear motor according to a third embodiment of the
present invention, taken along a plane perpendicular
to the driving direction. Figure 8 is a sectional
10 view of the linear motor of Figure 7, taken along the
driving direction. In these drawing, a magnetic
circuit (permanent magnets and yokes) is not
illustrated. In the first embodiment, one flat coil
1a and one bent coil 1b constitute a pair. In this
15 embodiment, as compared therewith, one flat coil 1a
and two bent coils 1b and 1c constitute one set. As
shown in Figure 8, in a region where a magnetic field
is produced by a magnetic circuit defined by permanent
magnets and yokes, the coils 1a - 1c are disposed
20 laterally at the same level. Further, portions of the
bent coils 1b and 1c are placed into a void core
portion of the flat coil 1a. Also, as shown in Figure
7, the bent coil 1b has its opposite end portions bent
upwardly above the flat coil 1a, while the bent coil
25 1c has its opposite end portions bent downwardly below
the flat coil 1a. In this manner, the bent coils 1b
and 1c are placed into the void core portion of the

09615665.07.1900

flat coil 1a as described, such that like the first embodiment the gap of the space where the magnetic field is produced can be made small and, therefore, the magnetic field can be enlarged. Because of the upward and downward bent portions at the opposite ends of the bent coils 1b and 1c, the jacket elements 14 and 14' are formed with inside recessed portions corresponding to the shapes of the coils, as illustrated. The remaining portion of this embodiment has substantially the same structure and function as of the first embodiment, and substantially the same advantageous results as of the first embodiment are attainable with this embodiment.

[Embodiment 4]

Figure 9 is a sectional view of a linear motor according to a fourth embodiment of the present invention, taken along a plane perpendicular to the driving direction. Denoted in Figure 9 at 1 is a coil, and denoted at 3 and 3' are permanent magnets for applying a magnetic field to the coil 1. Denoted at 2 and 2' are yokes on which the magnets 3 and 3' are mounted. Denoted at 14 and 14' are jacket elements, constituting a jacket, and denoted at 21a - 21d are reinforcing members provided on the jacket. Since the coil 1 and the permanent magnets 3 and 3' are relatively moved along a direction perpendicular

to the sheet of the drawing, the reinforcing members 21a - 21d are disposed in spaces between the jacket and the yokes 2 and 2' where the magnet 3 or 3' is not present. The reinforcing members 21a - 21d are fixed to the jacket by means of an adhesive agent or bolts, for example. Where bolts are used for the fixation, an adhesive material may be used to keep the seal, so as to prevent leakage of a cooling medium inside the jacket. The reinforcing members 21a - 21d thus do not interfere with the drive of the linear motor, that is, relative motion of the coil 1 and the magnets 3 and 3'. As regards these reinforcing members 21a - 21d, use of a non-magnetic material such as aluminum, ceramics or resin, for example, is preferable.

With the structure described above, the small-thickness portion of the jacket is reduced, such that unwanted large deformation of the small-thickness portion of the jacket due to the inside pressure of the cooling medium within the jacket, causing interference with the magnet 3 or 3' or breakage thereof, can effectively prevented. Thus, the inside pressure resistance of the jacket is improved and, therefore, the flow rate of the cooling medium can be enlarged. This directly leads to an improvement of the heat collection capacity of the cooling medium. As a result, without enlargement in size of the linear motor, the heat produced at the coil 1 when the linear

motor is driven can be collected more efficiently, and adverse influences of the heat to the component mounted on the linear motor can be avoided.

Particularly, when the linear motor is incorporated
5 into a high-precision positioning system, unwanted thermal deformation of the structure or undesirable fluctuation of an air, causing an error of a laser interferometer (for position measurement) can be prevented, such that the positioning precision can be
10 improved.

[Embodiment 5]

Figure 10 is a sectional view of a linear motor according to a fifth embodiment of the present
15 invention, taken along a plane perpendicular to the driving direction. Although permanent magnets and yokes are not illustrated, they are similar to those of Figure 9. The linear motor of this embodiment corresponds to a modification of the Figure 9
20 embodiment, wherein the jacket element 14 and the reinforcing members 21a and 21c, as well as the jacket element 14' and the reinforcing members 21b and 21d of Figure 9 are combined into integral structures, respectively, having a protruded shape such as
25 depicted at A in the drawing. Thus, the jacket elements 14 and 14' in this embodiment have such integral structures, respectively. More specifically,

09619665-071900

each of the jacket elements 14 and 14' has both of a function as a jacket and a function as a reinforcing member. As regards the jacket elements 14 and 14', use of a non-magnetic and electrically insulating material (or alternatively a high resistance material) such as ceramics or resin, for example, is preferable. With this embodiment, substantially the same advantageous results as of the fourth embodiment are attainable.

[Embodiment 6]

Figure 11 is a sectional view of a linear motor according to a sixth embodiment of the present invention, taken along a plane perpendicular to the driving direction. In this linear motor, the jacket serves as a guide for a component to be driven by the linear motor. In Figure 11, denoted at 31a and 31b are air pads opposed to the jacket element 14, and denoted at 32a and 32b are bases for the air pads 31a and 31b, respectively. Denoted at 33 is a member on which the yokes 2 and 2' for the magnets 3 and 3' as well as the bases 32a and 32b are mounted. Although there are coils inside the jacket elements 14 and 14', they are not illustrated. The surfaces of the jacket element 14 opposed to the air pads 31a and 31b function as guiding faces. On the other hand, the air pads 31a and 31b are arranged to discharge gaseous

fluids from their surfaces facing to the jacket
element 14. Thus, the air pads 31a and 31b and the
jacket element 14 constitute a static pressure
bearing. A gap of a few microns is maintained between
5 the jacket element 14 and the air pad 31a or 31b, such
that the jacket and the air pads are maintained out of
contact and confined with respect to the lateral
direction as viewed in the drawing. Although there is
no confining means illustrated in relation to the
10 longitudinal direction in the drawing, the member 33
and the like can be moved along a guide (not shown),
in a direction perpendicular to the sheet of the
drawing.

15 [Embodiment 7]

Referring now to Figure 12, an embodiment of
a scan type exposure apparatus wherein a linear motor
according to any one of the preceding embodiments is
incorporated as a driving system for a wafer stage or
20 a reticle stage, will be described.

As illustrated, a barrel base 96 is supported
on a floor or a base table 91 through dampers 98. The
barrel base 96 functions to support a reticle stage
base 94, and also it functions to support a projection
25 optical system 97 which is disposed between a reticle
stage 95 and a wafer stage 93.

The wafer stage 93 is supported by a stage

00649665-07900

base which is supported by the floor or the base
table, and it functions to carry a wafer thereon and
to position the same. On the other hand, the reticle
stage 95 is supported by a reticle stage base which is
5 supported by the barrel base 96. The reticle stage 95
carries thereon a reticle having a circuit pattern
formed thereon, and it is made movable. An
illumination optical system 99 provides exposure light
with which a wafer placed on the wafer stage can be
10 exposed to the reticle.

The wafer stage 93 is scaningly moved in
synchronism with the reticle stage 95. During the
scan motion of the reticle stage 95 and the wafer
stage 93, their positions are detected continuously by
15 means of interferometers and the thus detected
positions are fed back to driving units for the
reticle stage 95 and the wafer stage 93, respectively.
With this arrangement, the scan start positions of
these stages can be synchronized accurately and, also,
20 the scan speeds of them in a constant speed scan
region can be controlled precisely. In the scan
motion of these stages relative to the projection
optical system, the wafer is exposed to the reticle
pattern such that the circuit pattern is transferred
25 to the wafer.

In this embodiment, since a linear motor
according to any one of the preceding embodiments is

00019555-074900

used as a driving unit for the stage system, the cooling efficiency of the linear motor is high. The heat produced by the coil can be collected efficiently. Therefore, the structure effectively prevents the heat generated at the linear motor from being transmitted to the wafer stage 93 or the reticle stage 95 to cause a temperature rise thereof or a temperature rise of the ambience of the stage. As a result, the positioning precision of the wafer stage 93 can be improved significantly, and finally, a high precision pattern transfer operation can be accomplished.

[Embodiment 8]

Figure 13 is a flow chart of procedure for manufacture of microdevices such as semiconductor chips (e.g. ICs or LSIs), liquid crystal panels, or CCDs, for example, using an exposure apparatus such as described above.

Step 1 is a design process for designing a circuit of a semiconductor device. Step 2 is a process for making a mask on the basis of the circuit pattern design. Step 3 is a process for preparing a wafer by using a material such as silicon. Step 4 is a wafer process (called a pre-process) wherein, by using the so prepared mask and wafer, circuits are practically formed on the wafer through lithography.

Step 5 subsequent to this is an assembling step
(called a post-process) wherein the wafer having been
processed by step 4 is formed into semiconductor
chips. This step includes an assembling (dicing and
5 bonding) process and a packaging (chip sealing)
process. Step 6 is an inspection step wherein
operation check, durability check and so on for the
semiconductor devices provided by step 5, are carried
out. With these processes, semiconductor devices are
10 completed and they are shipped (step 7).

Figure 14 is a flow chart showing details of
the wafer process (step 4).

Step 11 is an oxidation process for oxidizing
the surface of a wafer. Step 12 is a CVD process for
15 forming an insulating film on the wafer surface. Step
13 is an electrode forming process for forming
electrodes upon the wafer by vapor deposition. Step
14 is an ion implanting process for implanting ions to
the wafer. Step 15 is a resist process for applying a
20 resist (photosensitive material) to the wafer. Step
16 is an exposure process for printing, by exposure,
the circuit pattern of the mask on the wafer through
the exposure apparatus described above. Step 17 is a
developing process for developing the exposed wafer.
25 Step 18 is an etching process for removing portions
other than the developed resist image. Step 19 is a
resist separation process for separating the resist

00619665 071900

material remaining on the wafer after being subjected to the etching process. By repeating these processes, circuit patterns are superposedly formed on the wafer.

With these processes, high density
5 microdevices can be manufactured.

In a linear motor according to the present invention, it is provided with a predetermined comb-shaped member or a reinforcement member extending in parallel to the driving direction. With this
10 structure, even if the pressure of a cooling medium is made larger or the thickness of a small-thickness portion of the jacket is made smaller, unwanted deformation or breakage of the jacket can be prevented. Therefore, the flow rate of the cooling
15 medium can be increased to improve the cooling efficiency. Reduction in size of the jacket and enlargement of the output thrust of the linear motor can be accomplished effectively.

The provision of the comb-shaped member or
20 the reinforcement member is effective to increase the natural frequency of the jacket, such that a precise driving operation is assured. Therefore, in accordance with a stage system, an exposure apparatus or a device manufacturing method of the present
25 invention, more efficient and precise stage motion, exposure operation and device manufacture are accomplished.

09649666 "071900

While the invention has been described with
reference to the structures disclosed herein, it is
not confined to the details set forth and this
application is intended to cover such modifications or
changes as may come within the purposes of the
improvements or the scope of the following claims.

10

15

20

25

09619663 071900

WHAT IS CLAIMED IS:

1. A linear motor, comprising:

a magnet;

a coil; and

5 a jacket having an inside comb-shaped member extending along a driving direction, wherein the coil is engaged by teeth of said comb-shaped member and wherein a cooling medium is flown through an inside space enclosed by said jacket.

10

2. A linear motor according to Claim 1, wherein said comb-shaped member includes base portions provided on mutually opposed inside faces of said jacket and formed in parallel to the driving direction and to be opposed to each other, and a pillar-like
15 portion for connecting said base portions, wherein the coil is floatingly supported by said base portions while it is held fixed by said pillar-like portion with respect to the driving direction.

20

3. A linear motor according to Claim 1, wherein said linear motor includes a plurality of coils arrayed along the driving direction with partial overlapping with each other, wherein each coil has a
25 bent end portion to avoid mutual interference of the partially overlapped portions of the coils, and wherein the coils are disposed with their central

00019555 071900

portions placed substantially at the same level.

4. A linear motor according to Claim 3, wherein
said jacket has a central small-thickness portion with
5 an outside recessed portion, wherein the bent end
portions of the coils are disposed at the recessed
portion, and wherein the central small-thickness
portion is reinforced by the recessed portion.

10 5. A linear motor according to Claim 1, wherein
said jacket serves as a guide for an element to be
driven by said linear motor.

6. A stage system, comprising:
15 a movable stage;
a linear motor having a magnet and a coil,
for driving said stage; and
a jacket having an inside comb-shaped member
extending along a driving direction, wherein the coil
20 is engaged by teeth of said comb-shaped member and
wherein a cooling medium is flown through an inside
space enclosed by said jacket.

7. An exposure apparatus, comprising:
25 a movable stage for holding a substrate
thereon;
a linear motor having a magnet and a coil,

09619665 "071900

for driving said stage; and

a jacket having an inside comb-shaped member
extending along a driving direction, wherein the coil
is engaged by teeth of said comb-shaped member and
5 wherein a cooling medium is flown through an inside
space enclosed by said jacket.

8. A device manufacturing method, comprising the
steps of:

10 applying a photosensitive material onto a
substrate;

exposing the substrate by use of an exposure
apparatus including a movable stage for holding a
substrate thereon, a linear motor having a magnet and
15 a coil, for driving said stage, and a jacket having an
inside comb-shaped member extending along a driving
direction, wherein the coil is engaged by teeth of
said comb-shaped member and wherein a cooling medium
is flown through an inside space enclosed by said
20 jacket; and

developing the exposed substrate.

9. A linear motor, comprising:

a magnet;

25 a coil; and

a jacket having a reinforcement portion
extending in parallel to a driving direction, wherein

09619665-071900

said coil is enclosed by said jacket and wherein a cooling medium is flown through an inside space of said jacket.

5 10. A linear motor according to Claim 9, wherein said reinforcement portion is formed on an outside face of said jacket.

10 11. A linear motor according to Claim 9, wherein said reinforcement portion is formed at a position not interfering with relative motion of said magnet and said coil.

15 12. A linear motor according to Claim 9, wherein said reinforcement portion is made of one of aluminum, ceramics and resin.

20 13. A linear motor according to Claim 9, wherein said reinforcement portion is made integral with said jacket, and wherein said reinforcement portion is defined by a portion having a protruded shape with respect to a level of a portion of said jacket where said magnet and said coil are opposed to each other.

25 14. A linear motor according to Claim 13, wherein said jacket and said reinforcement portion being integral with each other are made of one of ceramics

09619665 071900

and resin.

15. A linear motor according to Claim 13, wherein
the protruded shape portion of said jacket is defined
5 by an inside recessed portion of said jacket where a
portion of the coil is placed.

16. A linear motor according to Claim 9, wherein
at least one of an upper half and a lower half of a
10 section of said jacket taken along a plane
perpendicular to the driving direction has a recessed
shape portion.

17. A stage system, comprising:
15 a movable stage;
a linear motor having a magnet and a coil,
for driving said stage; and
a jacket having a reinforcement portion
extending in parallel to a driving direction, wherein
20 said coil is enclosed by said jacket and wherein a
cooling medium is flown through an inside space of
said jacket.

18. An exposure apparatus, comprising:
25 a movable stage for holding a substrate
thereon;
a linear motor having a magnet and a coil,

09019665 071900

for driving said stage; and

5 a jacket having a reinforcement portion
extending in parallel to a driving direction, wherein
said coil is enclosed by said jacket and wherein a
cooling medium is flown through an inside space of
said jacket.

19. A device manufacturing method, comprising the
steps of:

10 applying a photosensitive material onto a
substrate;

15 exposing the substrate by use of an exposure
apparatus having a movable stage for holding a
substrate thereon, a linear motor having a magnet and
a coil, for driving said stage, and a jacket having a
reinforcement portion extending in parallel to a
driving direction, wherein said coil is enclosed by
said jacket and wherein a cooling medium is flown
through an inside space of said jacket; and

20 developing the exposed substrate.

25

05619665-071900

ABSTRACT OF THE DISCLOSURE

A linear motor includes a magnet, a coil, and a jacket having an inside comb-shaped member extending along a driving direction, wherein the coil is engaged
5 by teeth of the comb-shaped member and wherein a cooling medium is flown through an inside space enclosed by the jacket. Unwanted deformation or breakage of the jacket can be avoided even if the pressure of the cooling medium is enlarged or the
10 thickness of a small-thickness portion of the jacket is made smaller. A higher cooling efficiency is thus attainable by increasing the flow rate of the cooling medium.

15

20

25

09619666.071900

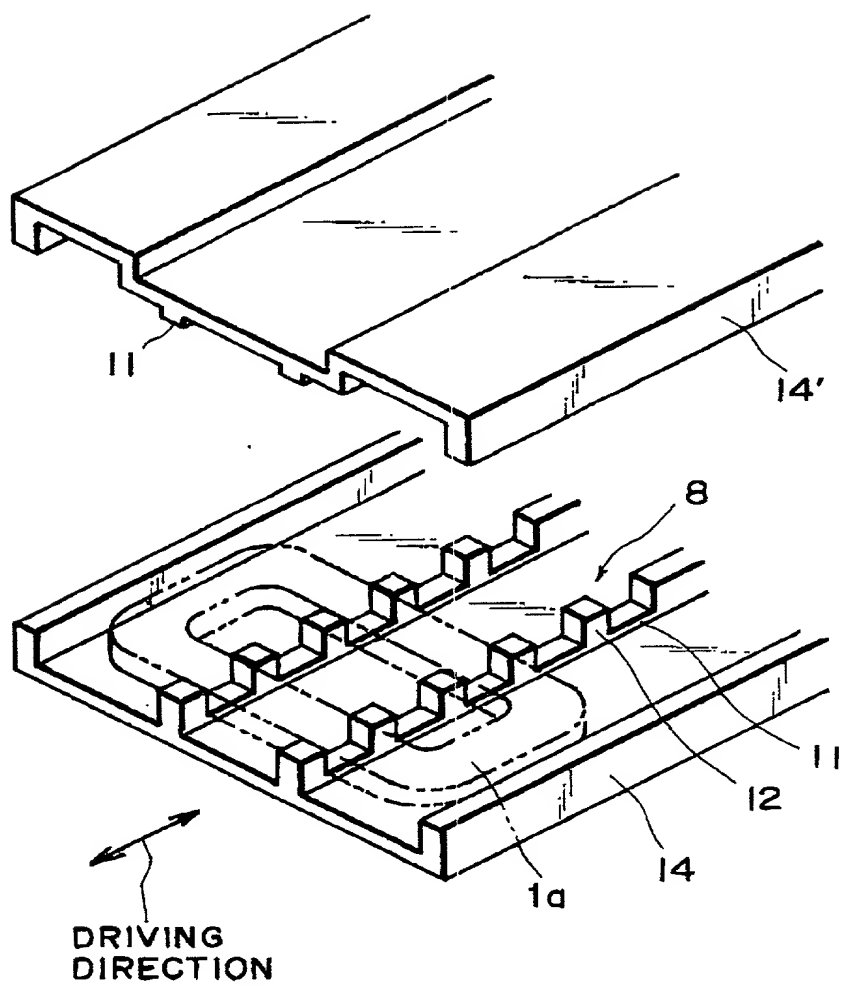


FIG. 1

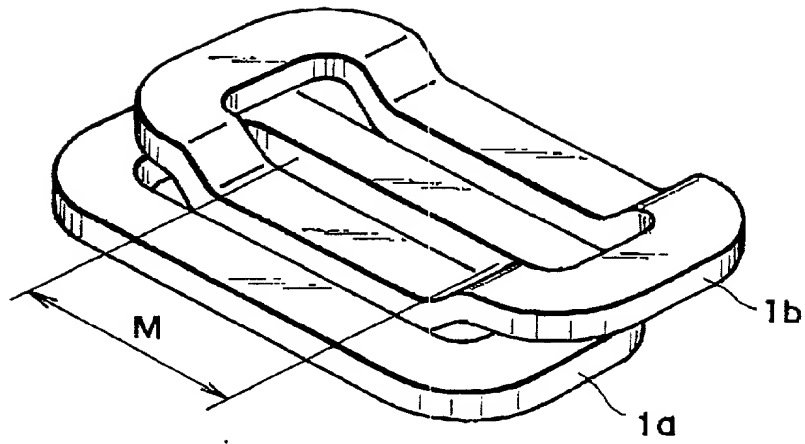


FIG. 2

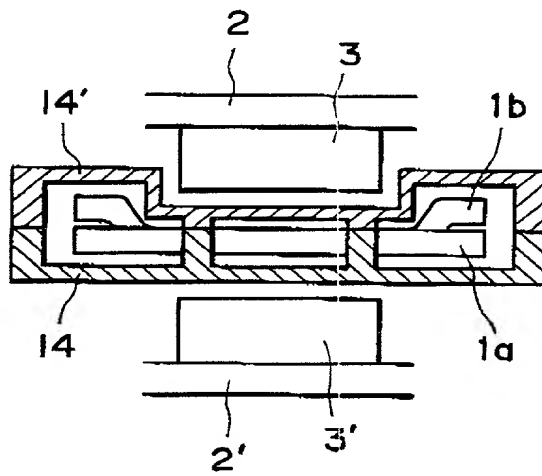


FIG. 3

FIG. 4

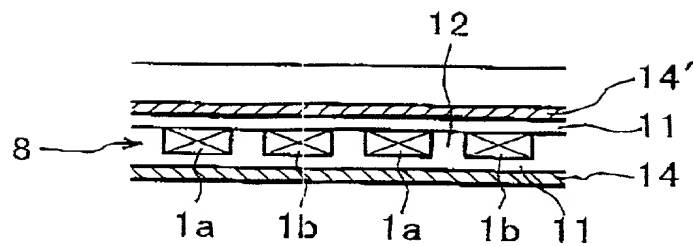


FIG. 5

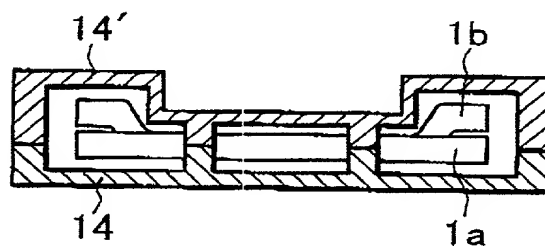


FIG. 6

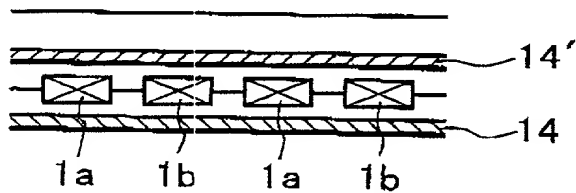


FIG. 7

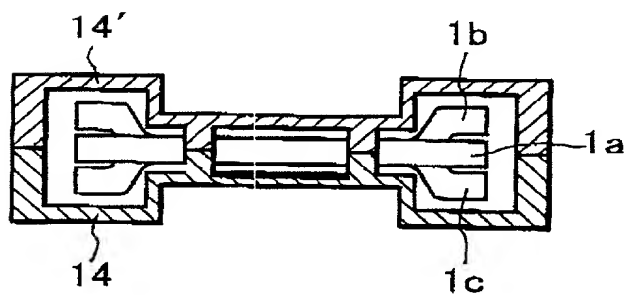
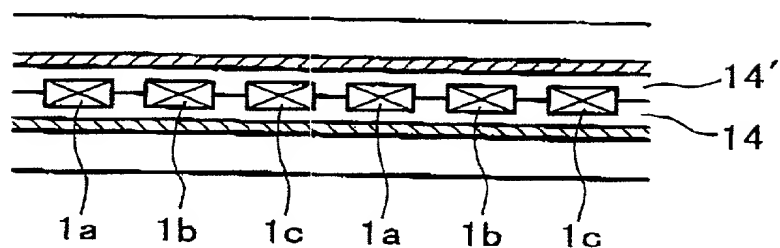


FIG. 8



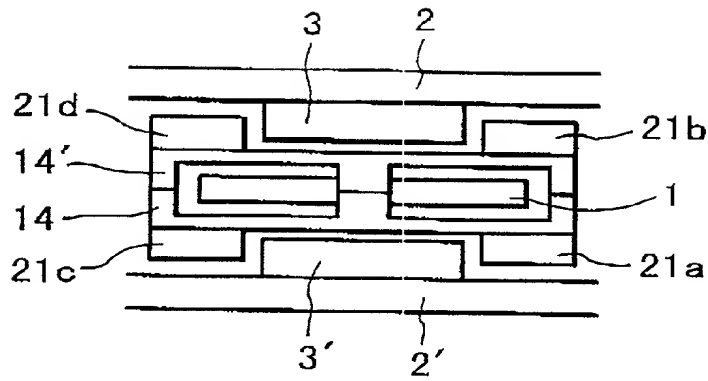


FIG. 9

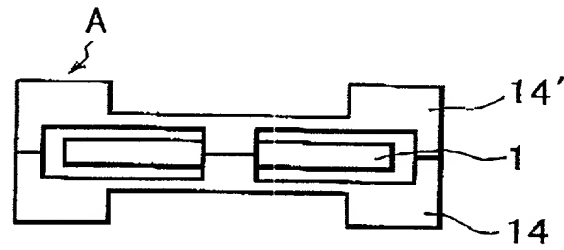


FIG. 10

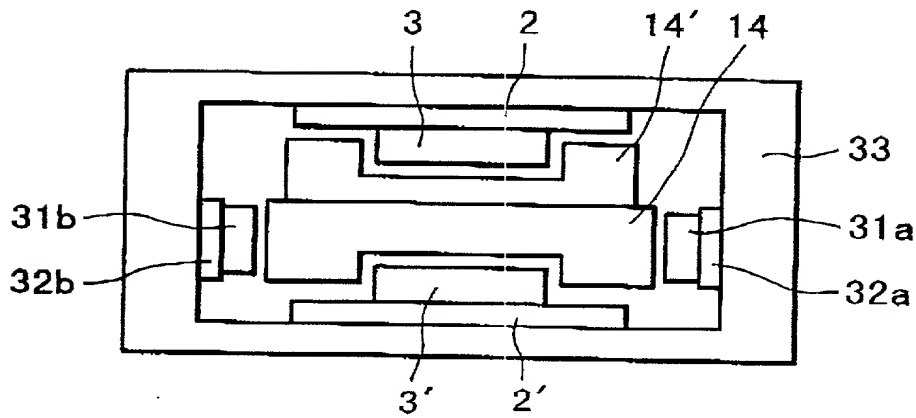


FIG. 11

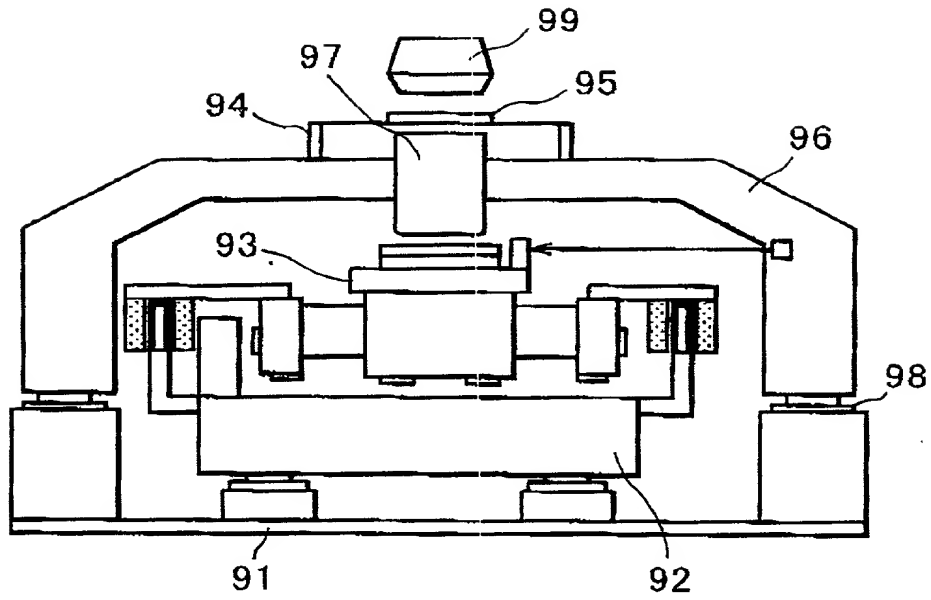


FIG. 12

006120-59961950

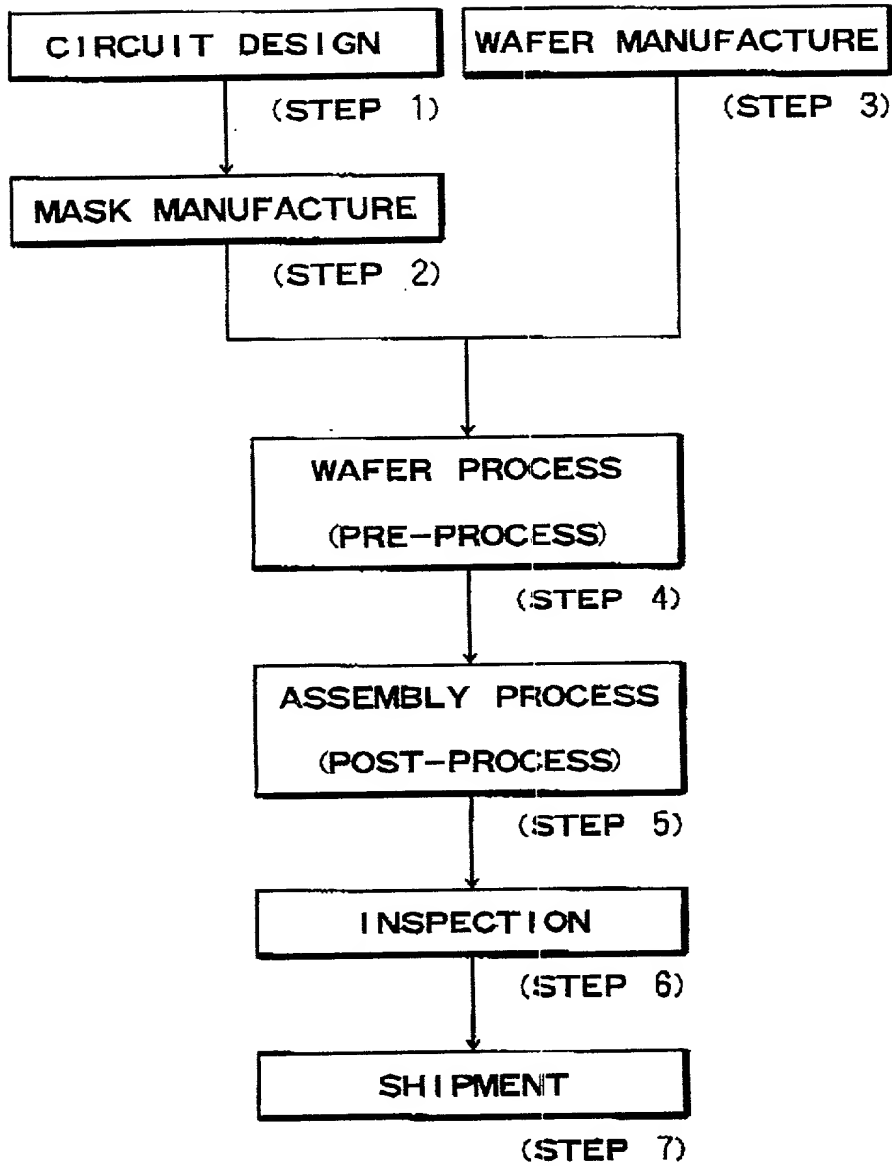


FIG. 13

00619665.071500

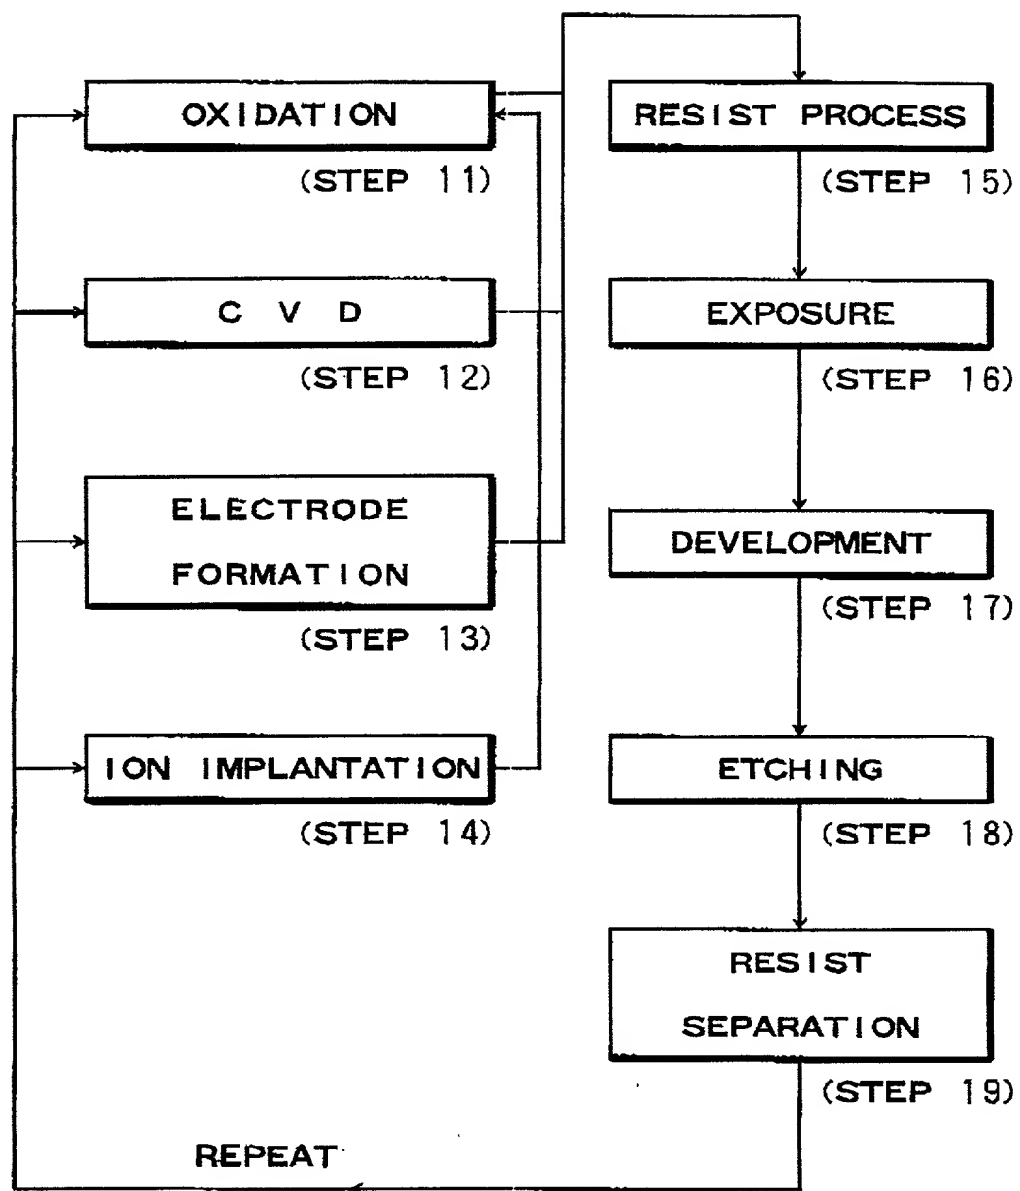


FIG. 14

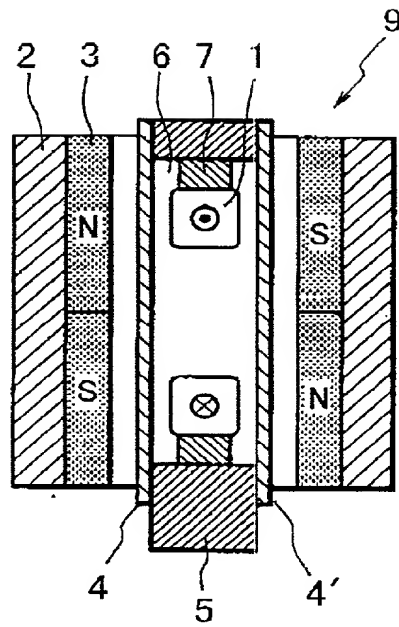


FIG. 15

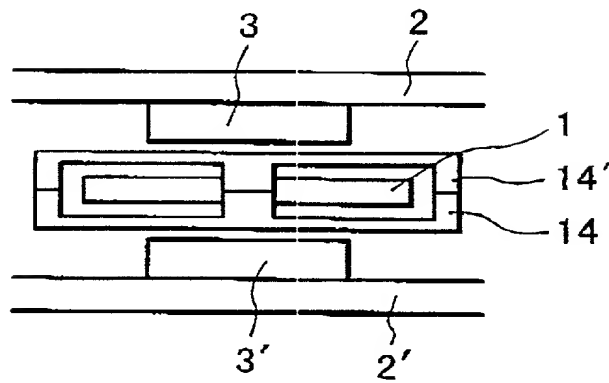


FIG. 16

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION
(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled LINEAR MOTOR STAGE SYSTEM FOR USE IN EXPOSURE APPARATUS the specification of which ☒ is attached hereto ☐ was filed on _____ as United States Application No. _____ or PCT International Application No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

| Country | Application No. | Filed (Day/Mo./Yr.) | (Yes/No) Priority Claimed |
|---------|-----------------|---------------------|------------------------------|
| JAPAN | 11-204974 | 19 JULY 1999 | Yes |

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application

| Application No. | Filed (Day/Mo./Yr.) | Status (Patented, Pending, Abandoned) |
|-----------------|---------------------|---------------------------------------|
|-----------------|---------------------|---------------------------------------|

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number.

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor Shigeto KAMATA
Inventor's signature _____
Date _____ Citizen/Subject of Japan
Residence 1259-119 Nishiyamachi, Hodogaya-ku, Yokohama-shi,
Kanagawa-ken, Japan
Post Office Address c/o CANON KABUSHIKI KAISHA, 30-2, Shimomaruko
3-chome, Ohta-ku, Tokyo, Japan

Full Name of Sole or Second Inventor Toshio MATSUKI
Inventor's signature _____
Date _____ Citizen/Subject of Japan
Residence 3-19-14 Meguro, Meguro-ku, Tokyo, Japan
Post Office Address c/o CANON KABUSHIKI KAISHA, 30-2, Shimomaruko
3-chome, Ohta-ku, Tokyo, Japan

GMJcmv